


The visual consistency of the project concept and the emphasis on cleanliness and hygiene are key elements that translate into positive user experiences.

The effect of floating cabins perfectly complements the prestige and elegance of facilities such as office buildings, hotels, or shopping centers. It is an excellent solution wherever interiors require exceptional style and a unique character.





Impressive impression of lightness



CE certificate valid throughout the European Union

Fittin steel

Fittings with a brushed steel finish




Fittings developed by ALSANIT are manufactured in Poland at the company headquarters




Production on CNC machines ensures precision and short lead times

Standard dimensions

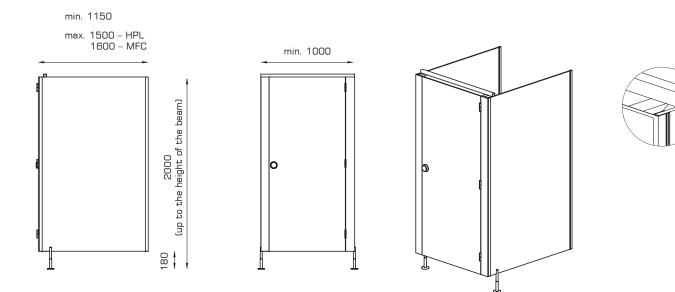

Standard equipment

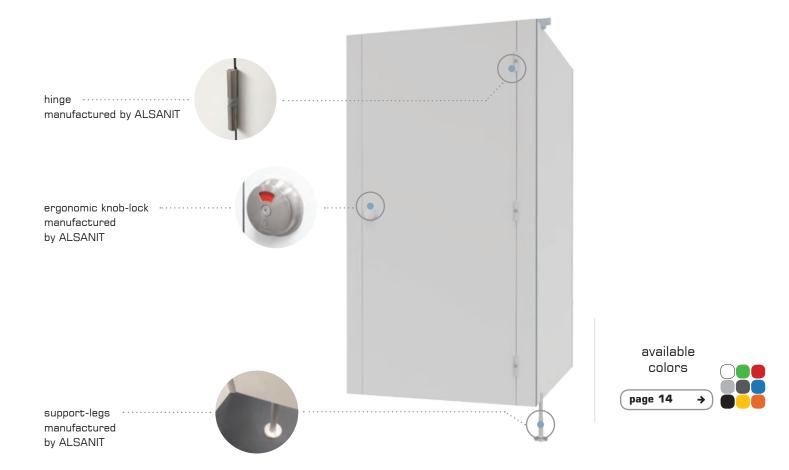

Construction details:

Hinges


- tested durability: 200,000 open/close cycles
- typically for ALSANIT, mounted to narrow edges of panels
- made of brushed steel with a polyamide insert
- gravity self-closing
- minimalist appearance
- optionally hinges for internal doors not visible from the outside


Knob-locks


- elegant, ergonomic and highly durable
- emergency opening capability
- universal for left/right doors
- bolt rotation angle of 360°
- "click" every 90°
- easy to use, including for individuals with disabilities
- white-red occupancy indicator

Support-legs

- "hanging" cubicle effect
- made of brushed steel
- ensure easy leveling of partitions
- for 10-18 mm boards mounted to the side of the board, for 28 mm and thicker boards screwed into the core
- adjustment range +/- 20 mm
- rosette mounted on two dowels, covered with a plate









Types of panels available for the system:

MFC

Laminated chipboard



MFC is compressed under high temperature and pressure using binding agents with wood chips. The top layer is a decorative melamine coating.

- edges are finished with durable edging using HOT-AIR technology (glueless)
- suitable for rooms with normal humidity

Fire classification: Ds1d0





beam

A solution for door frame for



Support leg mounted on a partition wall



Rear-mounted



Wall and partition mounting

HPL

High pressure laminate



HPL (High Pressure Laminate) - cellulose fibers saturated with resin and compressed under high pressure. The material is 100% waterproof and its properties are consistent throughout the entire board cross-section.

- milled edges-black core of the board is visible
- for rooms with high humidity

Fire classification:

Cs2d0 - 10 mm, Bs1d0 - 12 mm (option)





Rear-mounted beam



SP Sandwich panels (36 mm)

Panels with a total thickness of 36 mm - feature an aluminum frame filled with foamed polystyrene, 28 mm thick, with outer layers consisting of 4 mm HPL.

excellent rigidity and aesthetics

- ideal for full-height installations
- provide the best soundproofing

Fire classification: Es1d0





A solution for door frame for SP boards



Support leg screwed into the core



Rear-mounted beam



Possibility of using a handle




Concealed mounting for walls and partitions

URINAL PARTITIONS

By using an aluminum rosette, we achieved an effect of exceptional lightness.


ALSANIT urinal partitions are installed using rosettes, eliminating the need for support legs.

available colors

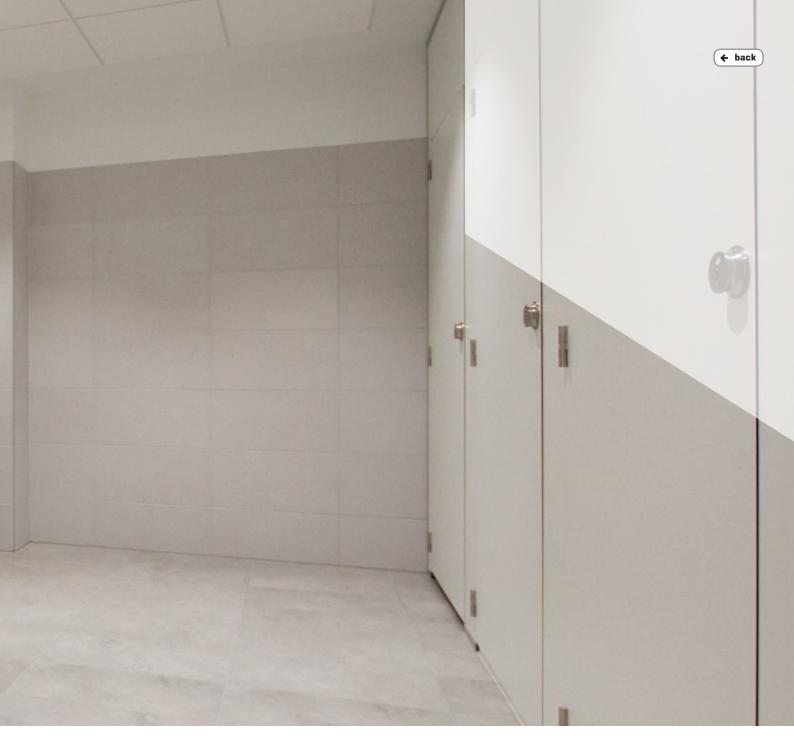

Urinal partitions

- Powder-coated rosette in a color close to RAL 7035
- Easy installation
- Minimalist appearance





MFC


HPL

VANITY TOPS

Sink countertops are an important element of restroom furnishings.


available colors page 14 →


Due to the direct exposure to water, they need to be made of durable materials and properly installed.

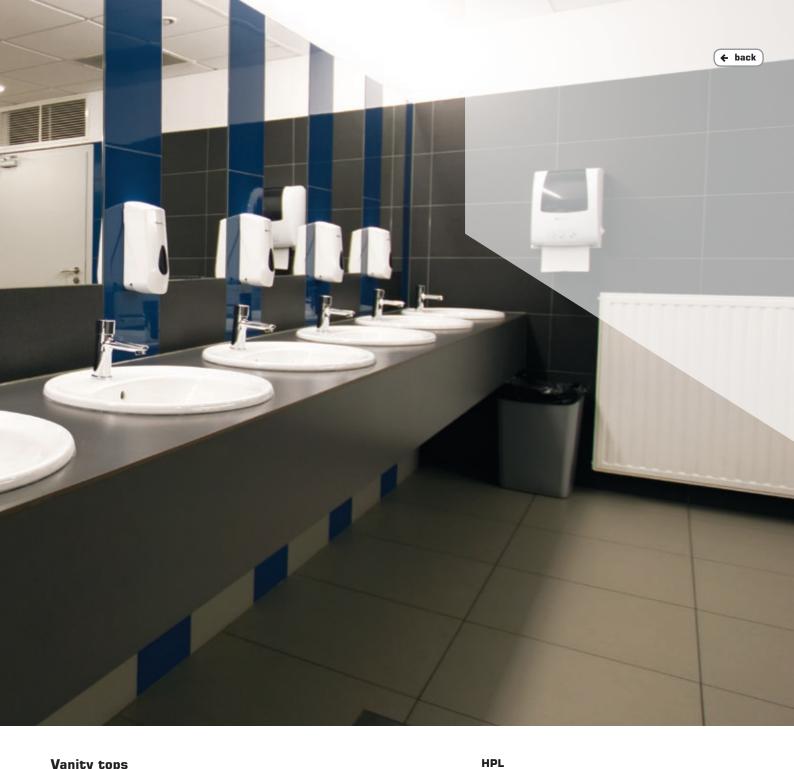

Vanity tops

- preparation for sink installation
- all visible edges routed
- need for panel joining for countertops longer than 2600 mm
- optionally additional mirror frames matching countertops





10 mm

12 mm




÷ 214 SHOWERS

Shower cubicles produced by ALSANIT are aesthetic, practical, and durable.

Thanks to the use of durable, and fully waterproof materials, ALSANIT shower cubicles are an investment for many years. Showers are typically made basing on the SOLARI system fittings.




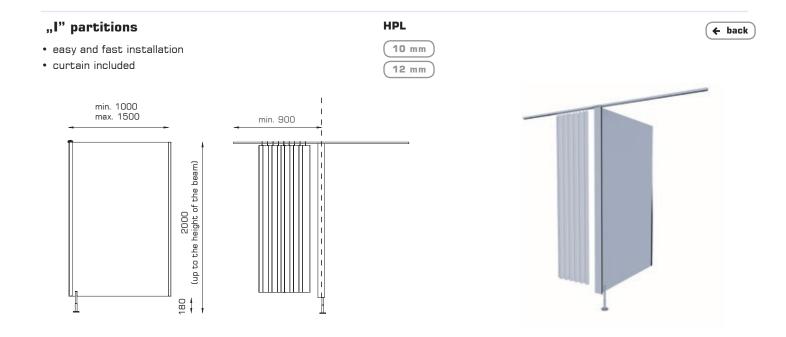

HPL


Showers "T" i "F"

- additional space for storing clothes
- curtain included



Showers with doors

- doors reinforced with ribs approximately 80 mm wide
- round profile for clothes or towel between the ribs





10 mm 12 mm








TECHNOWALL

Fast mounted and aesthetically pleasing wall claddings designed for large surfaces.




TECHNOWALL is a fully proprietary system of wall claddings with quick access to installations located behind them.


TECHNOWALL wall claddings

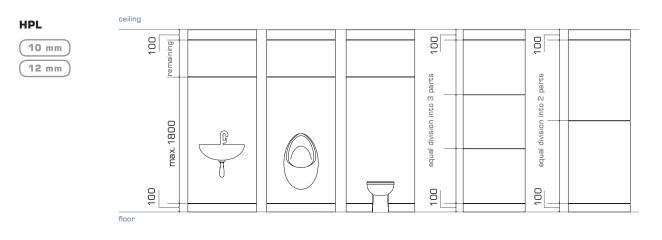


Installation:




1. Level and mount the bottom profile to the floor.



2. Place the steel frames for cladding on the profile, align, and attach them to the masonry wall.




3. Connect the frames with "shadow" panels. Mount masking panels at the bottom and top.



 Fit the cladding panels up to the height of the utilities and fixtures. For the cladding where fixtures will be installed, cut openings for the connections/fixtures.



5. Secure and connect the fixtures to the cladding.



6. Install the remaining cladding.


COLORS stock collection




colors available only for lockers and furniture



* sample colors

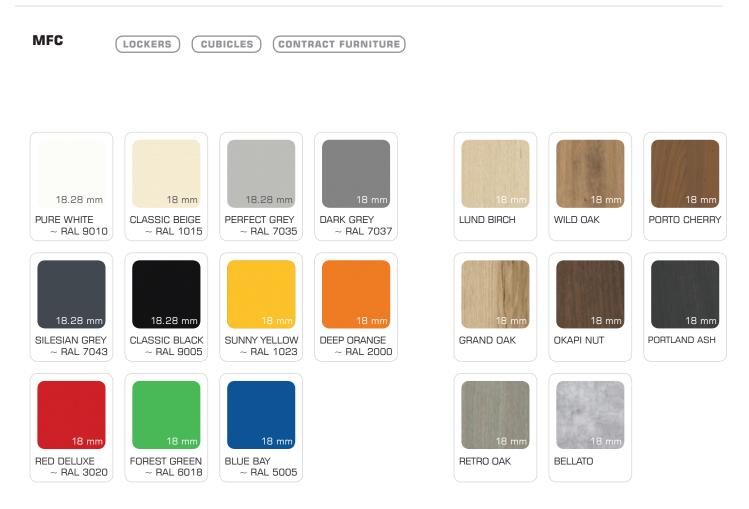

the color range is also available in the HIGH GLOSS version

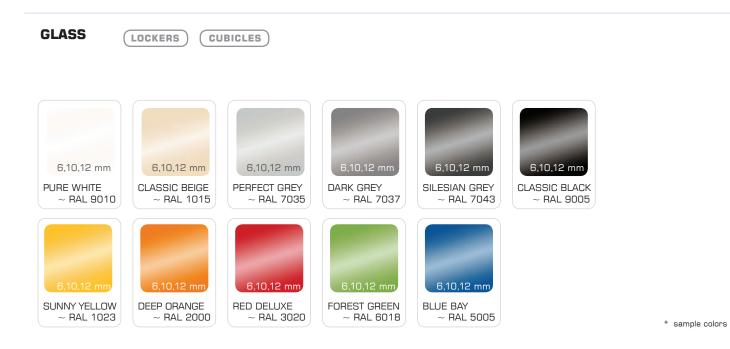

20+ 20 years of experience

25+ sales to over 25 countries

2600+ 2600 projects annually

8000+ sqm of ALSANIT's hall space

40000+ doors produced annually

We offer the LIFT system to clients who do not use standard solutions.

So that each room has its own unique, difficult-to-replicate style.



Alsanit Sp. z o.o. ul. Wieleńska 2, 64-980 Trzcianka, POLSKA

+48 67 253 23 60 export@alsanit.eu www.alsanit.eu